




Sface900

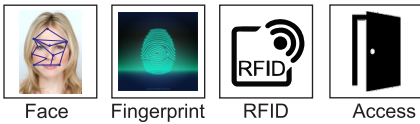

Face Fingerprint RFID Access

MULTI-BIOMETRIC TIME ATTENDANCE & ACCESS CONTROL SYSTEM

- Face capacity : 1200(1:N), 3000(1:1)
- Fingerprint capacity: 2000 (Optional 4000)
- ID Card capacity: 10,000
- Logs Capacity: 100,000
- Display: 4.3-Inch Capacitive Touch Screen
- Communication : TCP/IP, RS232/485, USB Host
- Fingerprint Sensor : 500 DPI Optical sensor
- FAR : $\leq 0.0001\%$ FRR : $\leq 1\%$
- Identification speed : < 0.5 sec
- Push Data: Yes
- Wiegand Signal : Output
- Power supply: 12V 3A
- Operating Temperature; 0°C to 45°C
- Operating Humidity: 20% - 80%
- Dimensions: 195.5 x 166.5 x 120mm(L x W x T)
- Package Weight: 1.6kg

Compatible Software & SDK



- Smart office suite desktop and web
- Smart office 365 cloud
- SDK for desktop applications

Optional

- Battery : 7.4 V, 2000 mAh Backup Battery,
- Mifare Card, Wi-Fi, 3G GPRS

Compatibility

- Compatible with Multi Door controllers via weigand
- External Speaker output available (optional)
- External Bulb Output available (optional)
- Support External Printer

Features

- High Verification speed
- Standard Functions : Automatic Status Switch, Self-Service Query, Work Code, SMS,DST, T9 Input, 9 Digit User ID, Scheduled Bell,
- Photo ID Interfaces for : 3rd Party Electric Lock, Door Sensor, Exit Button, Alarm
- One face template is registered for one user only
- Able to detect whether the face is an actual face or a photo , enhancing the security level of verification
- Outside installation (maximum 12,000 lux)