




Uface602

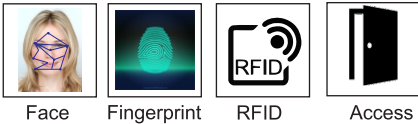

MULTI-BIO TIME ATTENDANCE & ACCESS CONTROL SYSTEM

Face capacity: 1200(1:N), 3000(1:1)

Fingerprint capacity: 2000

ID Card capacity: 10,000

Transaction Storage: 100,000

CPU : 1.0GHz

Communication: TCP/IP, RS232/485, USB Host

Display: 4.3-Inch Capacitive Touch Screen

Fingerprint Sensor : 500 DPI Optical sensor

FAR : $\leq 0.0001\%$ FRR : $\leq 1\%$

Identification speed : < 0.5 sec

Push Data: Yes

Wiegand Signal: Output

Standard Functions: Automatic Status Switch,

Self-Service Query, Work Code, SMS,

DST, T9 Input, 9 Digit User ID, Scheduled Bell,

Photo ID Access Control Interfaces for: 3rd Party

Electric Lock, Door Sensor, Exit Button, Alarm

Power supply: 12V 3A

Operating Temperature; 0 - 45

Operating Humidity: 20%-80%

Dimensions: 193.6 x 165.2 x 86mm(L x W x T)

Package Weight: 1.6kg

Features

- High Verification speed
- Advanced and user-friendly UI
- Easy to extend functions and customize client's requirements
- One face template is registered for one user only

Optional

Battery : 7.4 V, 2000 mAh Backup Battery,
Mifare Card, Wi-Fi, 3G GPRS

Compatibility

- Compatible with Multi Door controllers via weigand
- External Speaker output available (optional)
- External Bulb Output available (optional)
- Support External Printer

Compatible Software & SDK

SmartOffice
Time and Attendance Software

- Smart office suite desktop and web
- Smart office 365 cloud
- SDK for desktop applications