


## **C-24 Four Door Access Controller**

## Introduction

C24 four door access control board is a new generation of intelligent network access control products. It uses super network processor and mass memory to realize real network data exchange, high-speed data operation and super large user data management.

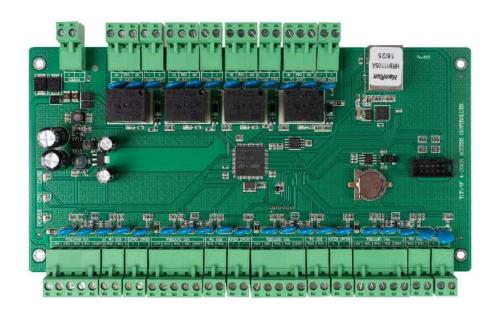

## **Product Parameters**

Working Voltage: DC9V-14V

Working Current: < 300mA

Temperature:  $0^{\circ}\text{C-}70^{\circ}\text{C}$ 

Humidity:10-90%RH

Door Control: 4

Readers: 8

Exit Button: 4 group

Door Sensor Interface: 4 group

Relay: 4 group

Alarm Extension: 4 input and 4 output (fire alarm, Probe alarm, burglar alarm, Gas alarm)

Reading Protocol: Wiegand 26 \ Wiegand 34 \ Wiegand 66

Register cards: 42,000

Record Capacity: 2,00,000 Communication Type: TCP/IP Communication Distance: TCP/IP (100 mtr)

Wiegand: 80 mtr

Size: 212\*130\*20 mm

## **Wiring Connection**

